



گروه بازرگانی اکسیر

EXIRBUSINESS

BYEXIR.COM



BEST
FIRE PROTECTION SYSTEMS

WWW.BYEXIR.COM



شير پروانه ای (Indicator Butterfly valve)

- 300PSI Grooved-End Butterfly Valve
- 300PSI Grooved-End Butterfly Valve (CLOSE)
- 300PSI Wafer Butterfly Valve
- 300PSI Wafer Butterfly Valve (CLOSE)



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها

- Approved Gear Operator for both Indoor or Outdoor use
- NSF Certified Epoxy Coated Ductile Iron body for Excellent Protection
- Elastomer Encapsulated Disc with Outstanding Flow Characteristics
- Extended Neck
- Low Torque Operation
- Options of Double Internal Supervisory Switches
- UL Listed





شیر یک طرفه (chek valve)

- 350PSI Grooved-End Swing Check Valve
- 350PSI Grooved-End Riser (Shotgun)
- 350PSI Flanged Swing Check Valve



- Installed in both Horizontal or Vertical Line with Upward Flow
- Easier and Faster to Maintain and Install
- EPDM non-stick leak tight sealing
- All Stainless Steel Wetted Parts to Provide Superior Corrosion Resistance
- UL Listed



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها





(WATER FLOW DETECTOR) فلو سوئیچ

- Flow sensitivity range: 4-10 GPM(15-38LPM).
- Contact rating: 8A@2S50VAC
- 3A@24VD
- C2.5A@ 30VDC
- Working Pressure: 450PSI.
- Working Temperature: 0°C to 68°C.
- Corrosion Protection: Fusion Bonded Epoxy Coated Interior and Exterior or Enamel Spray Paint, Interior and Exterior.
- UL Listed.
- GOST Certification.



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها

- Designed for both indoor and outdoor use; temperature range 0° C to 68° C.
- Equipped with tamper resistant screws to prevent unauthorized entry.
- Two synchronized switches are enclosed in a durable terminal block. Terminals are easy to read and wire.
- Built-In mechanical time delay feature; minimizing the risk of false alarms due to pressure surges or air trapped in the system.
- Offers excellent performance during riser vibrations caused by large in-rushes of water.
- Designed and built for accuracy and repeatability.





مانومتر (PRESSURE GAUGE)

- Suitable for Fire sprinkler systems
- Design: EN 837-1 & ASME B40.100
- Ranges: 0/300 psi (20bar), water or air
- Ambient temperature: -40 ~ +60°C
- Maximum medium temperature: +60°C
- UL Listed



شیر دروازه ای (GATE VALVE)



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها

- **300PSI Flanged-End Gate Valve**
- Bolted Bonnet . Outside Screw and Yoke "Resilient Wedge"
- Flanged-End
- 300 PSI/20.7Bar Non-Shock Cold Working Pressure
- Conforms to AWWA C509
- FBE Coated Interior and Exterior
- Maximum Operating Temperature 185°F / 85°C
- UL Listed





پمپ آتش نشانی

Application Split case pumps are specifically designed and tested for fire service application around the world including :

- Office buildings
- Hospitals
- Airports
- Manufacturing facilities
- Warehouses
- Power stations
- Oil and gas industry
- Schools/colleges
- Hatels



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها



UL LISTED

BEST
FIRE PROTECTION SYSTEMS

CENTRIFUGAL FIRE PUMP - SPLIT CASE

Model	Serial No.	No stages
SCF-250-200-350	S1017122200003	1
Rated G.P.M.	Rated R.P.M.	Rated PSIG
2500	2980	144
Rated B.H.P.	Max B.H.P.	Imp. Dia. mm
262	301	290
Driver Manufacturer and Serial No.		PSIG@150%Flow
		112
Controller Manufacturer and Serial No.		Max PSIG@Suction
		75

BEST
FIRE PROTECTION SYSTEMS






شیر تست و تخلیه (TEST & DRAIN VALVE)



مورد تایید
سازمان آتشنشانی
تهران و کلان شهرها

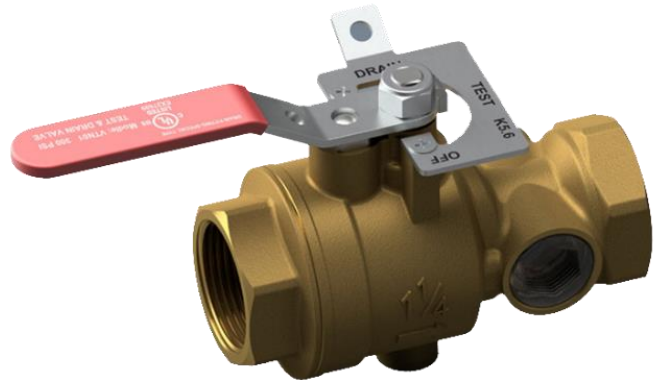

- 300PSI Test & Drain Valve
- Complies with the requirements of NFPA 13, NPPA 13D, and NFPA 13R requirements.
- Combines the functions of test and drain for wet sprinkler systems.
- Single-handle ball valves with three working positions.
- Tamper resistant test orifice and sight glass for the visual control.
- The "OFF" position can be locked to avoid misoperation.
- NPT threads end (BSPT available).
- Specifiable orifice Sizes: 3/8"(K2.8), 7/16"(K4.2), 1/2"(K5.6), 17/32"(K8.0).
- UL Listed



راه های ارتباط با ما :

09158957212
INFO@BYEXIR.COM



WWW.BYEXIR.COM